


NEGATIVE WIND PRESSURE LOAD/SPAN CHART
 PETERSEN ALUMINUM - PRECISION HIGHLINE SERIES
 HLC1 @ 12" X 24 GA STEEL (w/fastener leg)

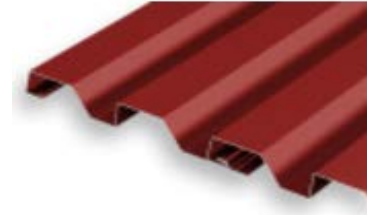

PAC PRECISION SERIES HIGHLINE - C1

| THREE OR MORE EQUAL SPANS | |
|---------------------------|-------------|
| Span (in feet) | (-) w (PSF) |
| 1.00 | 124.36 |
| 1.25 | 99.49 |
| 1.50 | 82.91 |
| 1.75 | 71.06 |
| 2.00 | 62.18 |
| 2.25 | 55.27 |
| 2.50 | 49.75 |
| 2.75 | 45.22 |
| 3.00 | 41.45 |
| 3.25 | 38.27 |
| 3.50 | 35.53 |
| 3.75 | 33.16 |
| 4.00 | 31.09 |

NOTES

- 1 (-) W = Allowable Uniform Wind Pressure, psf
- 2 Charted values consider Bending Stress, Connection Strength and a deflection limit of L/180
- 3 Allowable Bending Stress determination considers a Factor-of-Safety of 1.65
- 4 Allowable Connection Strength determination considers a Factor-of-Safety of 2.0
- 5 Negative wind pressure testing utilized ASTM E-330 protocol.
- 6 Tests were performed by Farabaugh Engineering & Testing, Inc.
- 7 Section of Properties determination based on the latest edition of the AISI Specification or Aluminum Association Testing.

4/13/2017