



COPING TRANSITION MITERS

OUTSIDE MITER

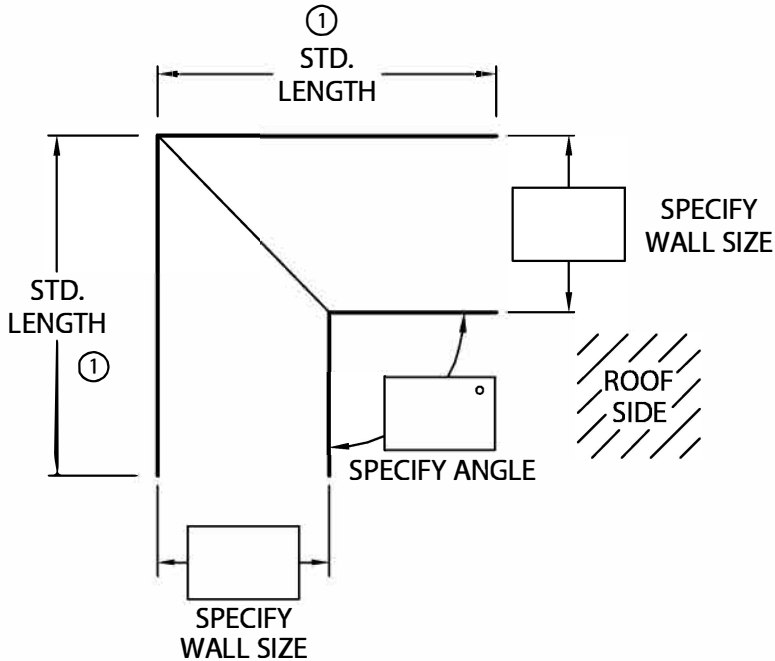


INSIDE MITER

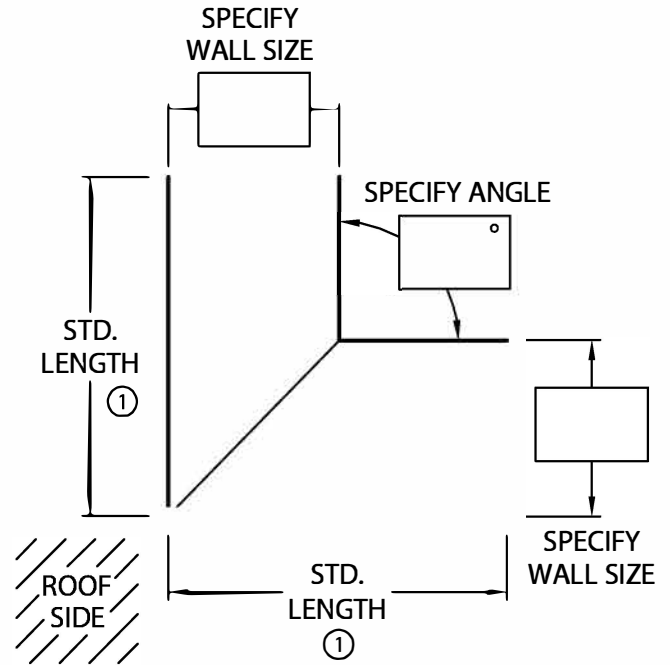

FOR CUSTOM LEG LENGTHS MODIFY DRAWINGS ABOVE

NOTES:

- ① THE STANDARD LEG LENGTH FOR COPING WITH A DRIP IS THE LARGER WALL SIZE + $9 \frac{5}{8}$ ".
 THE STANDARD LEG LENGTH FOR COPING WITH A FLUSH FACE IS THE LARGER WALL SIZE + $10 \frac{1}{8}$ ".

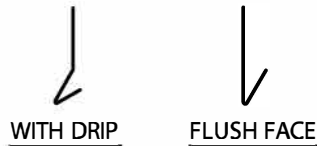

- ② WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

MATERIAL:

- 24 GA. GALVANIZED STEEL
 22 GA. GALVANIZED STEEL
 .040" ALUMINUM
 .050" ALUMINUM
 .063" ALUMINUM
 OTHER _____
- COLOR: _____
 FINISH: _____

QUANTITIES:

- _____ OUTSIDE MITERS @ (_____ °)
 _____ INSIDE MITERS @ (_____ °)
- SPECIFY ACCESSORY TYPE:
 WELDED ②
 QUICKLOCK

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:



PHONE: 800-323-1960 FAX: 800-722-7150
 WWW.PAC-CLAD.COM
 E-MAIL: INFO@PAC-CLAD.COM

DATE: 03/06/14

DRN BY: JJC

CKD BY: SAK

SHT.# _____ OF _____

DWG# 41011-12587

B